

Application Rate Chart


Roadway De-Icing with Hypro FC-ESI110-08 Nozzle*
Using 5 gpm pump

US Lane-Mile (63,360 ft-sq)

Speed (MPH)	Rate (G/LM)
20	14
15	19
12	24
10	28
8	36
6	48
5	57
4	72

Metric Lane-Km (3000 m-sq)

Speed (KPH)	Rate (L/LM)
20	45
18	50
16	56
14	64
12	75
10	91
8	112

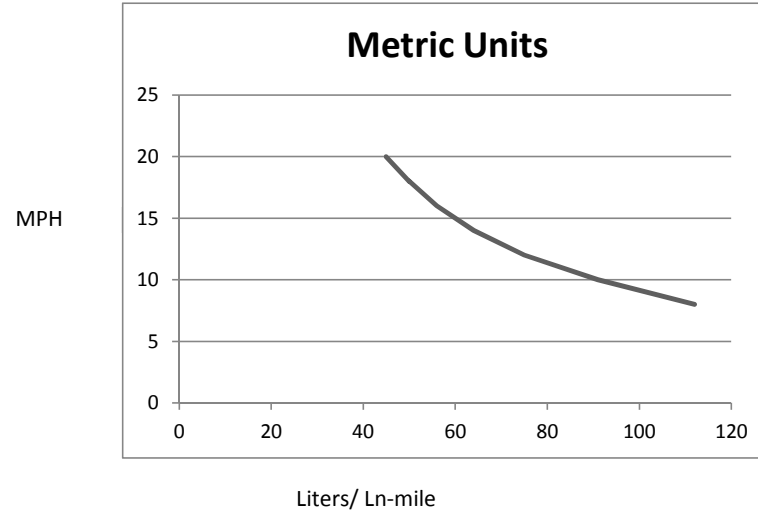

* Values include a correction factor for specific gravity of 1.3. It does not account for variability in viscosity relative to temperature.